

2011

# Assessment of acid sulfate soil materials (phase 2): Wakool River Billabong (Wetland ID 20246)

Nicholas J. Ward  
*Southern Cross University*

Richard T. Bush  
*Southern Cross University*

Leigh A. Sullivan  
*Southern Cross University*

J Coughran

Diane M. Fyfe  
*Southern Cross University*

---

## Publication details


Ward, NJ, Bush, RT, Sullivan, LA, Coughran, J & Fyfe DM 2011, *Assessment of acid sulfate soil materials (phase 2): Wakool River Billabong (Wetland ID 20246)*, report prepared for Murray-Darling Basin Authority. Southern Cross GeoScience Technical Report 411, Southern Cross University, Lismore, NSW.

ePublications@SCU is an electronic repository administered by Southern Cross University Library. Its goal is to capture and preserve the intellectual output of Southern Cross University authors and researchers, and to increase visibility and impact through open access to researchers around the world. For further information please contact [epubs@scu.edu.au](mailto:epubs@scu.edu.au).

# Assessment of Acid Sulfate Soil Materials (Phase 2): Wakool River Billabong (Wetland ID 20246)

N.J. Ward, R.T. Bush, L.A. Sullivan, J. Coughran and D.M. Fyfe

## FINAL REPORT

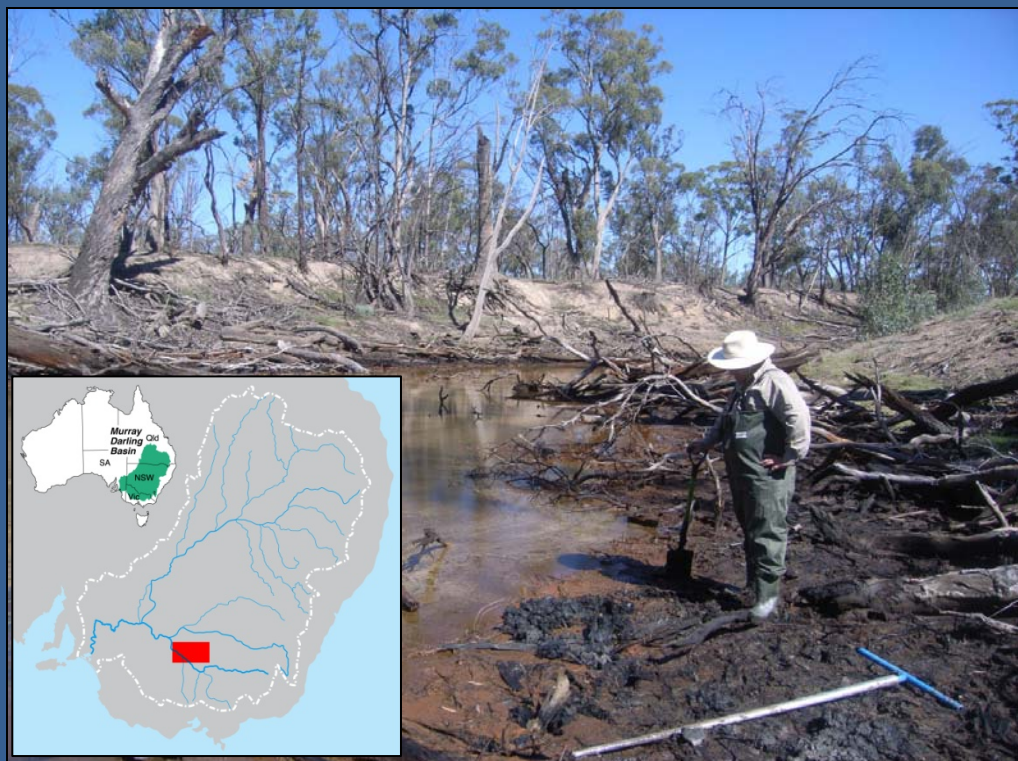

**Southern Cross GeoScience Report 411**  
Prepared for the Murray-Darling Basin Authority

## **Copyright and Disclaimer**

© Murray-Darling Basin Authority. Graphical and textual information in the work (with the exception of photographs and the MDBA logo) may be stored, retrieved and reproduced in whole or in part, provided the information is not sold or used for commercial benefit and its source is acknowledged. Reproduction for other purposes is prohibited without prior permission of the Murray-Darling Basin Authority, or the copyright holders in the case of photographs.

To the extent permitted by law, the copyright holder (including its employees and consultants) exclude all liability to any person for any consequences, including but not limited to all losses, damages, costs, expenses and any other compensation, arising directly or indirectly from using this report (in part or in whole) and any information or material contained in it.

The contents of this publication do not purport to represent the position of the Murray-Darling Basin Authority. They are presented to inform discussion for improved management of the Basin's natural resources.

### **Cover Photograph:**

*View of the creek channel at site 20246\_2. The soil consisted of a cover of possibly schwertmannite, followed by monosulfidic black ooze (MBO) and a soft grey clay below.  
Photographer: Rob Muller.*

# Contents

<b>LIST OF FIGURES</b> .....	<b>II</b>
<b>LIST OF TABLES</b> .....	<b>III</b>
<b>EXECUTIVE SUMMARY</b> .....	<b>IV</b>
<b>1. INTRODUCTION</b> .....	<b>1</b>
<b>2. LABORATORY METHODS</b> .....	<b>4</b>
2.1. LABORATORY ANALYSIS METHODS .....	4
2.1.1. <i>Summary of laboratory methods</i> .....	4
2.1.2. <i>Contaminant and metalloid dynamics method</i> .....	4
2.1.3. <i>Monosulfide formation potential method</i> .....	4
2.1.4. <i>Reactive metals method</i> .....	5
2.2. QUALITY ASSURANCE AND QUALITY CONTROL.....	5
<b>3. RESULTS AND DISCUSSION</b> .....	<b>6</b>
3.1. SUMMARY OF SOIL LABORATORY RESULTS .....	6
3.1.1. <i>Contaminant and metalloid dynamics data</i> .....	6
3.1.2. <i>Reactive metals data</i> .....	13
3.2. INTERPRETATION AND DISCUSSION OF RESULTS .....	14
<b>4. RISK ASSESSMENT</b> .....	<b>16</b>
4.1. RISK ASSESSMENT FRAMEWORK.....	16
4.2. ASSESSMENT OF RISKS .....	18
4.2.1. <i>Risks associated with acidification</i> .....	18
4.2.2. <i>Risks associated with contaminant mobilisation</i> .....	18
4.2.3. <i>Risks associated with de-oxygenation</i> .....	19
<b>5. BROAD ACID SULFATE SOIL MANAGEMENT OPTIONS</b> .....	<b>20</b>
<b>6. CONCLUSIONS AND RECOMMENDATIONS</b> .....	<b>22</b>
<b>7. REFERENCES</b> .....	<b>24</b>
<b>8. APPENDICES</b> .....	<b>25</b>
APPENDIX 1. SOIL ANALYTICAL DATA.....	26

## List of Figures

FIGURE 1-1: MAP SHOWING THE AREAS ASSESSED IN THE WAKOOL RIVER BILLABONG (WETLAND ID 20246) DURING THE PHASE 1 ASSESSMENT. ....	2
FIGURE 3-1: PH, EC AND EH DYNAMICS OVER 35 DAYS FOR THE WAKOOL RIVER BILLABONG SITES (20246_3 AND 20246_4).....	10
FIGURE 3-2: CONTAMINANT AND METALLOID DYNAMICS (AG, AL AND AS) OVER 35 DAYS FOR THE WAKOOL RIVER BILLABONG SITES (20246_3 AND 20246_4).....	10
FIGURE 3-3: CONTAMINANT AND METALLOID DYNAMICS (CD, CO, CR, CU, FE AND MN) OVER 35 DAYS THE WAKOOL RIVER BILLABONG SITES (20246_3 AND 20246_4). ....	11
FIGURE 3-4: CONTAMINANT AND METALLOID DYNAMICS (NI, PB, SB, SE, V AND ZN) DYNAMICS OVER 35 DAYS THE WAKOOL RIVER BILLABONG SITES (20246_3 AND 20246_4).....	12

# List of Tables

TABLE 1-1. PRIORITY RANKING CRITERIA ADOPTED BY THE SCIENTIFIC REFERENCE PANEL OF THE MURRAY-DARLING BASIN ACID SULFATE SOILS RISK ASSESSMENT PROJECT (FROM MDBA 2010). .....	2
TABLE 1-2. RATIONALE OF SAMPLE SELECTION FOR PHASE 2 ANALYSIS.....	3
TABLE 1-3. SUMMARY OF WAKOOL RIVER BILLABONG SAMPLES ANALYSED FOR PHASE 2 ASSESSMENT.....	3
TABLE 2-1. PHASE 2 DATA REQUIREMENTS - LIST OF PARAMETERS AND OBJECTIVE FOR CONDUCTING THE TEST.....	4
TABLE 3-1. SUMMARY OF CONTAMINANT AND METALLOID DYNAMICS DATA .....	8
TABLE 3-2. SUMMARY OF THE DEGREE OF HAZARD ASSOCIATED WITH THE MEASURED CONTAMINANT AND METALLOID CONCENTRATIONS.....	14
TABLE 4-1: STANDARDISED TABLE USED TO DETERMINE THE CONSEQUENCES OF A HAZARD OCCURRING (FROM MDBA 2011). .....	16
TABLE 4-2: LIKELIHOOD RATINGS FOR THE DISTURBANCE SCENARIO (FROM MDBA 2011).....	17
TABLE 4-3: RISK ASSESSMENT MATRIX (ADAPTED FROM STANDARDS AUSTRALIA & STANDARDS NEW ZEALAND 2004).....	17
TABLE 4-4: SUMMARY OF THE RISKS ASSOCIATED WITH ACID SULFATE SOILS IN WAKOOL RIVER BILLABONG.	19
TABLE 5-1: SUMMARY OF MANAGEMENT OPTIONS AND POSSIBLE ACTIVITIES (FROM EPHC & NRMMC 2011). .....	21
TABLE 8-1. SAMPLE 20246_3.1 CONTAMINANT AND METALLOID DYNAMICS DATA. ....	26
TABLE 8-2. SAMPLE 20246_3.2 CONTAMINANT AND METALLOID DYNAMICS DATA. ....	27
TABLE 8-3. SAMPLE 20246_4.1 CONTAMINANT AND METALLOID DYNAMICS DATA. ....	28
TABLE 8-4. SAMPLE 20246_4.2 CONTAMINANT AND METALLOID DYNAMICS DATA. ....	29
TABLE 8-5. REACTIVE METALS DATA (MG/KG DRY WT.).....	30

# EXECUTIVE SUMMARY

Detailed assessments of acid sulfate soils within the Murray-Darling Basin (MDB) are conducted as a two-phase process under the MDB Acid Sulfate Soils Risk Assessment Project (ASSRAP). An initial Phase 1 acid sulfate soil investigation of the Wakool River Billabong (Wetland ID 20246) in March 2010 showed acid sulfate soils to be a priority concern within this wetland (Ward *et al.* 2010). Based on Phase 1 recommendations, a Phase 2 investigation was undertaken for the Wakool River Billabong to determine the nature, severity and the specific risks associated with acid sulfate soil materials. Phase 2 activities included soil laboratory analysis, a risk assessment, and interpretation and reporting, including discussion on broad acid sulfate soil management options.

The Phase 2 assessment of the Wakool River Billabong examined both the contaminant and metalloid dynamics and reactive metals associated with surface layers from two sites within the wetland. These results were used to determine the risks associated with contaminant mobilisation. The risks associated with both acidification and de-oxygenation were determined primarily using data from the Phase 1 assessment.

The contaminant and metalloid dynamics tests were undertaken to assess the release of metals during a water extraction, and to assess changes with time as saturated soils by incubating soil materials for periods of 1, 7, 14 and 35 days. The degree to which metal and metalloid concentrations exceed ANZECC/ARMCANZ water quality guideline values for environmental protection was used to characterise the degree of hazard. For Wakool River Billabong, the contaminant and metalloid dynamics test over 35 days showed that under the experimental conditions nine of the metals examined (including cadmium (Cd), cobalt (Co), chromium (Cr), copper (Cu), iron (Fe), manganese (Mn), nickel (Ni), silver (Ag) and zinc (Zn)) were found to exceed the water quality guidelines (ANZECC/ARMCANZ 2000). The guidelines for cobalt (Co), iron (Fe) and silver (Ag) were exceeded by more than 10 times at one site, with iron (Fe) exceeding the guideline by more than 100 times.

The contaminant and metalloid behaviour often varied between the metals/metalloids examined during the inundation experiments. The reductive dissolution of iron and possibly manganese minerals seemed to have partially controlled the release of sorbed arsenic, although the controls on the release of other metals were not clear. The trend with some metals/metalloids indicates further potential for release had the incubation experiments been allowed to proceed for a longer timeframe; it is also likely that many of the metals/metalloids will become incorporated into sulfide minerals following further reduction.

As shown in the table below, the metals found to exceed the ANZECC water quality guidelines during the inundation experiments represent a low to high hazard. The reactive metal concentrations were also found to be sufficiently high to be a potential hazard if released into surrounding waters. In natural systems the dynamics of metal release will be governed by the upward chemical flux, which is a function of soil type, water flow, diffusion and chemistry of the soils near the sediment-water interface (MDBA 2011).

A risk assessment framework was applied to determine the specific risks associated with acidification, contaminant mobilisation and de-oxygenation (MDBA 2011). The Phase 2 assessment identified the following risks associated with the presence of acid sulfate soils in the Wakool River Billabong:

- high acidification risk,
- medium contaminant mobilisation risk, and
- high de-oxygenation risk.

Degree of Hazard	Guideline Threshold	Metal/Metalloid
No Hazard	Value below ANZECC guideline threshold.	Al, As, Pb, Sb, Se, V
Low Hazard	Value exceeds ANZECC guideline threshold, but is less than 10x exceedance.	Cd, Cr, Cu, Mn, Ni, Zn
Moderate Hazard	Value exceeds ANZECC guideline threshold by 10x or more, but is less than 100x exceedance.	Ag, Co
High Hazard	Value exceeds ANZECC guideline threshold by 100x or more.	Fe

These findings indicate that, if not managed appropriately, the acid sulfate soil materials identified in the Wakool River Billabong have the potential to present a serious risk to the environmental values of both the wetland and adjacent waters. This report outlines the variety of management options available to manage acid sulfate soils in inland aquatic ecosystems. The most appropriate management strategy for the Wakool River Billabong would be to prevent oxidation of the acid sulfate soil materials identified. Neutralisation may be the best management strategy in the event of disturbance. However, in designing a management strategy for dealing with acid sulfate soils in affected inland wetlands, other values and uses of a wetland need to be taken into account to ensure that any intervention is compatible with other management plans and objectives for the wetland.

It is important to note that the soil materials collected in March 2010 as part of the Phase 1 assessment only provided a snapshot of the acid sulfate soil materials present and the conditions at selected locations in the wetland. While recent inundation within the wetland may have minimised the risks identified in the short-term, it is also likely that this inundation will lead to further formation of acid sulfate soil materials.

It is recommended that, within the context of other management objectives for the wetland, consideration be given to undertaking water quality monitoring to identify potential contamination as a result of the disturbance of acid sulfate soils within the wetland. The presence of some high risks identified in this Phase 2 assessment indicates that senior management attention is probably needed (MDBA 2011).



# 1. INTRODUCTION

At its March 2008 meeting, the Murray–Darling Basin Ministerial Council discussed the emerging issue of inland acid sulfate soils and the associated risks to Murray–Darling Basin waterways and agreed that the extent of the threat posed by this issue required assessment. The purpose of the Murray–Darling Basin Acid Sulfate Soils Risk Assessment Project was to determine the spatial occurrence of, and risk posed by, acid sulfate soils at priority wetlands in the River Murray system, wetlands listed under the Ramsar Convention on Wetlands of International Importance and other key environmental sites in the Murray–Darling Basin. The project involved the selection of wetlands of environmental significance, as well as those that may pose a risk to surrounding waters. These wetlands were then subjected to a tiered assessment program, whereby wetlands were screened through a desktop assessment stage, followed by a rapid on-ground appraisal, and then detailed on-ground assessment if results of previous stages indicated an increased likelihood of occurrence of acid sulfate soils.

Detailed assessments of acid sulfate soils within the Murray-Darling Basin (MDB) are conducted as a two-phase process under the MDB Acid Sulfate Soils Risk Assessment Project (ASSRAP). Detailed Phase 1 acid sulfate soil assessments have been undertaken in both wetlands and channel systems throughout the MDB as part of the MDB ASSRAP. Phase 1 investigations are initially undertaken to determine whether acid sulfate soil materials are present (or absent) in the study area, and provide characterisation of the properties and types of acid sulfate soils. Phase 2 investigations are only conducted if the acid sulfate soil materials from Phase 1 are determined to be a priority concern for the study area and, based on Phase 1 recommendations, selected samples undergo further investigations to determine the nature, severity and the specific risks associated with the acid sulfate soil materials. Phase 2 activities include: (i) soil laboratory analysis to confirm and refine the hazards associated with contaminant mobilisation and/or deoxygenation, (ii) a risk assessment, and (iii) interpretation and reporting, including discussion on broad acid sulfate soil management options.

Detailed Phase 1 acid sulfate soil assessments were undertaken at almost 200 wetlands and river channels throughout the Murray-Darling Basin. In the Edward and Wakool Rivers region, 12 wetlands were investigated by Southern Cross GeoScience (Ward *et al.* 2010). From these Phase 1 investigations, Wakool River Billabong, Glen Esk-Rusty Waterhole and Boiling Downs Creek were selected for further investigation. This report outlines the results of Phase 2 activities on selected samples from the Wakool River Billabong (Figure 1-1).

Following the Wakool River Billabong Phase 1 assessment (Ward *et al.* 2010) and the priority ranking criteria adopted by the Scientific Reference Panel of the MDB ASSRAP (see Table 1-1), selected sites from within the Wakool River Billabong were chosen for Phase 2 detailed assessment. The Wakool River Billabong Phase 1 assessment identified there was one high priority site based on sulfuric material, three high priority sites based on hypersulfidic material, one high priority site based on hyposulfidic ( $S_{CR} \geq 0.10\%$ ) material, and two high priority sites based on monosulfidic material in the Wakool River Billabong (Ward *et al.* 2010). In addition, all four sampling sites examined had a high priority ranking for Phase 2 detailed assessment based on monosulfidic black ooze (MBO) formation hazard (Ward *et al.* 2010). Phase 2 investigations were carried out on selected samples from two high priority sites (i.e. sites 20246\_3 and 20246\_4) identified in the Phase 1 assessment.

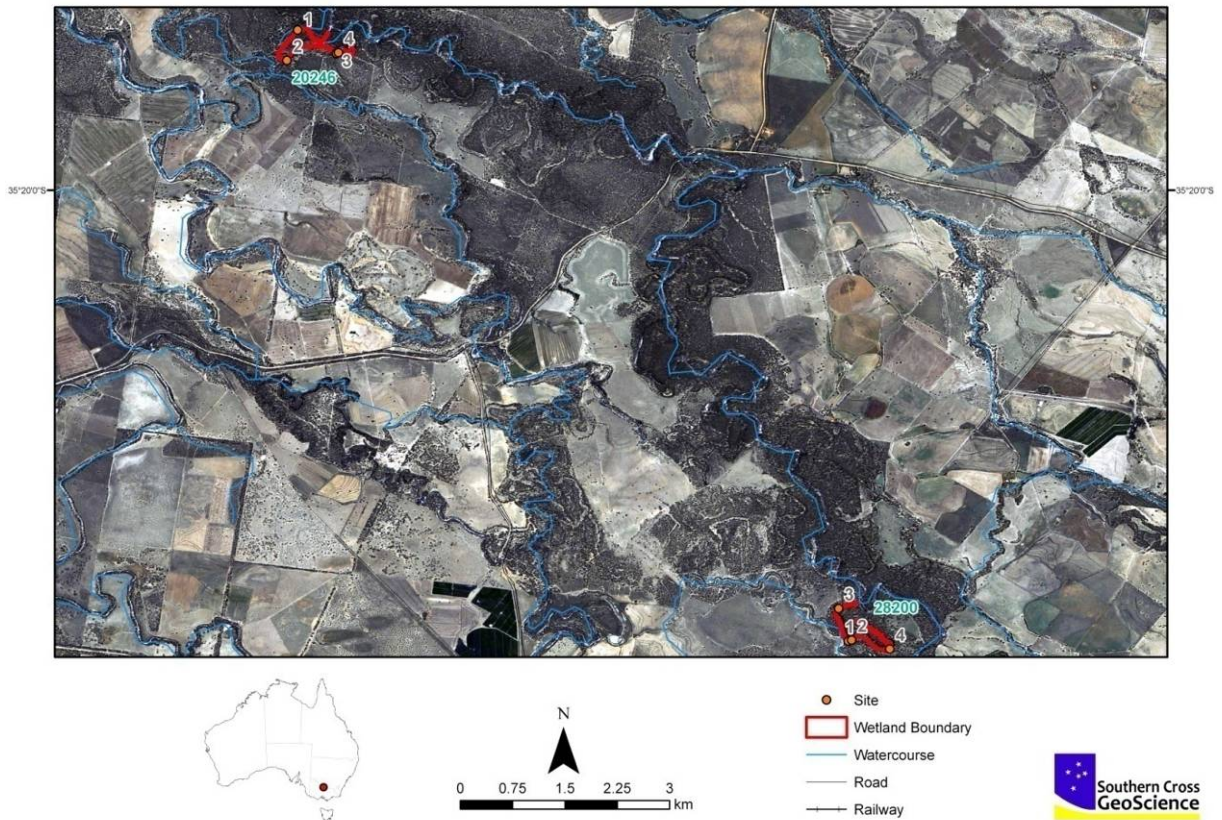


Figure 1-1: Map showing the areas assessed in the Wakool River Billabong (Wetland ID 20246) during the Phase 1 assessment.

Table 1-1. Priority ranking criteria adopted by the Scientific Reference Panel of the Murray-Darling Basin Acid Sulfate Soils Risk Assessment Project (from MDBA 2010).

Priority	Soil material
<b>High Priority</b>	All sulfuric materials.
	All hypersulfidic materials (as recognised by <u>either</u> 1) incubation of sulfidic materials or 2) a positive net acidity result with a Fineness Factor of 1.5 being used).
	All hyposulfidic materials with $S_{CR}$ contents $\geq 0.10\%$ S.
	All surface soil materials (i.e. within 0-20 cm) with water soluble sulfate (1:5 soil:water) contents $\geq 100 \text{ mg SO}_4 \text{ kg}^{-1}$ .
	All monosulfidic materials.
<b>Moderate Priority</b>	All hyposulfidic materials with $S_{CR}$ contents $< 0.10\%$ S.
<b>No Further Assessment</b>	Other acidic soil materials.
	All other soil materials.

A summary of the soil laboratory analyses undertaken as part of the Phase 2 assessment and the sample selection criteria for each analysis are given in Table 1-2. Soil samples identified to undergo Phase 2 laboratory analysis are primarily from the surface layer, as this is the soil most likely to have initial contact with water. A list of the samples selected for Phase 2 analysis for the Wakool River Billabong is presented in Table 1-3.

**Table 1-2. Rationale of sample selection for Phase 2 analysis.**

Parameter	Samples selected
Contaminant and metalloid dynamics	Conducted on selected upper two surface samples
Monosulfide formation potential	Conducted on surface samples of dry sites that meet the water extractable sulfate criteria for monosulfides
Reactive metals	Conducted on selected upper two surface samples

**Table 1-3. Summary of Wakool River Billabong samples analysed for Phase 2 assessment.**

Soil Laboratory Test	Wakool River Billabong (Wetland ID 20246)	<sup>1</sup> n
Contaminant and metalloid dynamics	3.1 (0-5 cm), 3.2 (5-10 cm), 4.1 (0-5 cm), 4.2 (5-10 cm)	4
Monosulfide formation potential	none	0
Reactive metals	3.1 (0-5 cm), 3.2 (5-10 cm), 4.1 (0-5 cm), 4.2 (5-10 cm)	4

<sup>1</sup>n = total number of samples analysed

## 2. LABORATORY METHODS

### 2.1. Laboratory analysis methods

#### 2.1.1. Summary of laboratory methods

A list of the parameters measured and each of the method objectives for the Phase 2 assessment are summarised below in Table 2-1. All soil samples analysed in this Phase 2 assessment were collected and subsequently stored as part of the Phase 1 field assessment.

**Table 2-1. Phase 2 data requirements - list of parameters and objective for conducting the test.**

Parameter	Objective
Contaminant and metalloid dynamics	Assists with determining impacts on water quality by simulating time frames that create anaerobic conditions. Identifies metal release concentrations that may occur over a 5 week time frame.
Monosulfide formation potential	Determine relative propensity for monosulfides to form following inundation.
Reactive metals	Assists with determining impacts on water quality by determining weakly to moderately strongly bound metals.

Guidelines on the approaches that were followed as part of this Phase 2 assessment for the contaminant and metalloid dynamics (CMD) and monosulfide formation potential (MFP) methods are presented in full in the detailed assessment protocols (see Appendices 7 and 8, MDBA 2010). Any variations to the two methods outlined in the detailed assessment protocols are presented in Sections 2.1.2 and 2.1.3. The reactive metals method has only recently been added to the Phase 2 assessment procedure and is presented in Section 2.1.4.

#### 2.1.2. Contaminant and metalloid dynamics method

The guidelines for the contaminant and metalloid dynamics method are outlined in Appendix 7 of the detailed assessment protocols (MDBA 2010). In this study supernatant was collected and assessed at four intervals including 24 hours, 7 days, 14 days and 35 days. The concentration of 15 metals/metalloids (i.e. aluminium (Al), antimony (Sb), arsenic (As), cadmium (Cd), chromium (Cr), cobalt (Co), copper (Cu), iron (Fe), lead (Pb), manganese (Mn), nickel (Ni), selenium (Se), silver (Ag), vanadium (V) and zinc (Zn)) was determined by ICP-MS (Inductively Coupled Plasma - Mass Spectrometry) (APHA 2005). Redox potential (Eh) and pH were determined at each interval using calibrated electrodes linked to a TPS WP-80 meter; Eh measurements are presented versus the standard hydrogen electrode. Electrical conductivity (EC) was determined using a calibrated electrode linked to a TPS WP-81 meter. All parameters were measured on filtered (0.45 µm) water samples.

#### 2.1.3. Monosulfide formation potential method

The guidelines for the monosulfide formation potential method are outlined in Appendix 8 of the detailed assessment protocols (MDBA 2010). No samples from the Wakool River Billabong were selected for monosulfide formation potential analysis.

#### **2.1.4. Reactive metals method**

In this Phase 2 assessment a reactive metals method was carried out instead of the x-ray fluorescence (XRF) spectrometry method outlined in the detailed assessment protocols (MDBA 2010). While the XRF method provides data on the total elements in the soil, the reactive metals method gives an indication of the potential metal concentrations that may be released into the surrounding waters. In this method samples for analysis were prepared by disaggregation (not grinding) using a 'jaw crusher', and then sieved to include only the <2 mm fine earth fraction. A total of 2.5 g sediment was added to 40 mL of 0.1 M HCl, gently mixed for 1 hour and filtered through a pre-acid washed 0.45 micron nitro-cellulose filter. As with the contaminant and metalloid dynamics method, the metals were determined by ICP-MS and included aluminium (Al), antimony (Sb), arsenic (As), cadmium (Cd), chromium (Cr), cobalt (Co), copper (Cu), iron (Fe), lead (Pb), manganese (Mn), nickel (Ni), selenium (Se), silver (Ag), vanadium (V) and zinc (Zn). The reactive metals test was conducted on all samples that underwent the contaminant and metalloid dynamics test.

#### **2.2. Quality assurance and quality control**

For all tests and analyses, the quality assurance and quality control procedures were equivalent to those endorsed by NATA (National Association of Testing Authorities). The standard procedures followed included the monitoring of blanks, duplicate analysis of at least 1 in 10 samples, and the inclusion of standards in each batch. In addition, the contaminant and metalloid dynamics tests were duplicated.

Reagent blanks and method blanks were prepared and analysed for each method. All blanks examined here were either at, or very close to, the limits of detection. On average, the frequencies of quality control samples processed were: 10% blanks, ≥ 10% laboratory duplicates, and 10% laboratory controls. The analytical precision was ±10% for all analyses.

## 3. RESULTS AND DISCUSSION

### 3.1. Summary of soil laboratory results

#### 3.1.1. Contaminant and metalloid dynamics data

The contaminant and metalloid dynamics data for the four Wakool River Billabong soil materials examined (i.e. 20246\_3.1, 20246\_3.2, 20246\_4.1 and 20246\_4.2) are presented in Appendix 1 (Tables 8-1 to 8-4) and summarised in Table 3-1. Table 3-1 also compares the pore-water metal contents to the relevant national water quality guideline for environmental protection (ANZECC/ARMCANZ 2000). Results for all parameters measured are presented in Figures 3-1 to 3-4.

The pH, electrical conductivity (EC) and redox potential (Eh) dynamics over 35 days of inundation for the Wakool River Billabong soil materials are presented in Figure 3-1. The pH was below the ANZECC guideline of 6.5 over the 35 day timeframe of the experiment, except for the soil materials from site 20246\_3 following 14 days of inundation (Figure 3-1). An increase in pH was observed with all soil materials over the initial 14 days. All soil materials showed a decrease in Eh during the inundation experiments, although one of the soil materials (i.e. 20246\_3.1) showed an overall increase in Eh after 35 days. The data indicates that the initial increase in pH observed with all soil materials is a consequence of reduction processes consuming acidity. Previous studies have often found inundation removes the acidity in partially-oxidised sediments as the acidity gets consumed from the reduction of iron (III) oxides, sulfates and other oxidised species by anaerobic bacteria (Dent 1986).

The electrical conductivities decreased during the experiment and all soil materials exceeded the ANZECC guideline of 2200  $\mu\text{S}/\text{cm}$  throughout the experiment with the exception of 20246\_4.2 which decreased below the guideline on day 35 (Figure 3-1). Substantially higher conductivities were observed at site 20246\_3. The decrease in conductivity with time would suggest the formation of insoluble mineral phases during the inundation experiment.

It is well established that inundating oxic soils can dramatically alter the mobility of metals and metalloids. The contaminant and metalloid dynamics results for the Wakool River Billabong soil materials are presented in Figures 3-2 to 3-4. Under the experimental conditions nine of the metals examined (i.e. cadmium (Cd), cobalt (Co), chromium (Cr), copper (Cu), iron (Fe), manganese (Mn), nickel (Ni), silver (Ag) and zinc (Zn)) were found to exceed the ANZECC water quality guidelines during the inundation experiments (Table 3-1). Two metals (i.e. lead (Pb) and vanadium (V)) were below the limit of detection for all soil materials over the 35 day inundation period. Many of the metals (i.e. cadmium (Cd), cobalt (Co), copper (Cu), iron (Fe), manganese (Mn), nickel (Ni), silver (Ag) and zinc (Zn)) were above the ANZECC guideline at all sampling intervals with one or more of the soil materials. The sulfuric surface soil material (0-5 cm) at site 20246\_4 had the highest metal concentration for several metals (i.e. aluminium (Al), cadmium (Cd), copper (Cu), manganese (Mn), lead (Pb) and zinc (Zn)). The guidelines for cobalt (Co) and iron (Fe) and silver (Ag) were exceeded by more than 10 times at site 20246\_3. Both soils materials examined from site 20246\_3 exceeded the iron (Fe) guideline by more than 100 times.

The metal/metalloid behaviour during the 35 day incubation period often varied between the metals/metalloids examined (Figures 3-2 to 3-4). The magnitude of mobilisation is affected by many factors that include but are not exclusive to: 1) the abundance and form of metal and metalloid contaminants; 2) the abundance and lability of organic matter; 3) the abundance and reactivity of iron minerals; 4) availability of sulfate; 5) acid/alkalinity buffering capacity; 6) pH; 7) EC; 8) clay content; 9) microbial activity; 10) temperature; and 11) porosity (MDBA 2010). It is expected that the steady increase in the iron (Fe) concentration

observed throughout the incubation at site 20246\_3 is largely a consequence of ferric iron ( $\text{Fe}^{3+}$ ) reduction releasing ferrous iron ( $\text{Fe}^{2+}$ ) into solution (Figure 3-3). Manganese also shows a slight increase at site 20246\_3 suggesting reduction to a more soluble form (i.e.  $\text{Mn}^{2+}$ ) (Figure 3-3). Burton *et al.* (2008) found significant mobilisation of arsenic (As) associated with ferric iron reduction following the inundation of acid sulfate soil materials, and this was also observed in this study (Figure 3-2).

The trend with some metals/metalloids indicates there is the potential for further release had the incubation experiments been allowed to proceed for a longer timeframe. However, it is also expected that many of the metals/metalloids will become incorporated into iron sulfide minerals (due to sorption to and/or co-precipitation) or precipitated as non-ferrous sulfides following further reduction.

Table 3-1. Summary of contaminant and metalloid dynamics data

Parameter	units	ANZECC Guidelines	20246_3.1 (0-5 cm)		20246_3.2 (5-10 cm)		20246_4.1 (0-5 cm)		20246_4.2 (5-10 cm)	
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
pH		6.5-8.0	5.45	6.61	6.18	6.66	4.32	5.08	4.77	4.98
EC*	$\mu\text{S cm}^{-1}$	125-2,200	6,685	12,435	6,915	12,625	4,005	7,175	1,753	4,615
Eh	mV	-	192	408	161	321	311	441	324	439
Ag	$\mu\text{g l}^{-1}$	0.05	0.1	4.8	<0.1	1.3	<0.1	0.3	<0.1	<0.1
Al <sup>A</sup>	$\text{mg l}^{-1}$	0.055	<0.01	<0.01	<0.01	<0.01	0.06	0.08	0.01	0.03
As <sup>B</sup>	$\mu\text{g l}^{-1}$	13	<1.0	5.3	<1.0	11.9	<1.0	<1.0	<1.0	<1.0
Cd	$\mu\text{g l}^{-1}$	0.2	<0.1	<0.1	<0.1	<0.1	0.4	0.5	0.1	0.2
Co	$\mu\text{g l}^{-1}$	2.8	9.8	44.9	2.2	50.7	23.3	26.0	5.8	7.3
Cr <sup>C</sup>	$\mu\text{g l}^{-1}$	1	<1.0	4.2	<1.0	1.5	<1.0	1.5	<1.0	1.2
Cu <sup>H</sup>	$\mu\text{g l}^{-1}$	1.4	1.3	1.7	1.4	1.7	2.3	3.1	<1.0	1.1
Fe	$\text{mg l}^{-1}$	0.30	0.81	32.41	0.79	46.82	0.28	0.35	0.17	0.92
Mn	$\text{mg l}^{-1}$	1.70	9.48	12.11	10.32	13.40	14.12	16.20	3.28	3.65
Ni <sup>H</sup>	$\mu\text{g l}^{-1}$	11	4.1	16.8	1.8	18.3	13.9	16.5	3.4	4.8
Pb <sup>H</sup>	$\mu\text{g l}^{-1}$	3.4	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Sb	$\mu\text{g l}^{-1}$	9	<1.0	1.5	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Se	$\mu\text{g l}^{-1}$	11	6.7	10.8	6.5	10.0	<1.0	2.9	<1.0	<1.0
V	$\mu\text{g l}^{-1}$	6	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Zn <sup>H</sup>	$\mu\text{g l}^{-1}$	8	4.8	14.7	1.8	10.8	47.3	58.1	12.6	29.2

Exceeded ANZECC Guideline (x1)

Exceeded ANZECC Guideline (x10)

Exceeded ANZECC Guideline (x100)

Notes accompanying this table can be found on the following page.



**Notes.**

The ANZECC guideline values for toxicants refer to the Ecosystem Protection – Freshwater Guideline for protection of 95% of biota in 'slightly-moderately disturbed' systems, as outlined in the Australian Water Quality Guidelines for Fresh and Marine Water Quality (ANZECC/ARMCANZ 2000).

\* ANZECC water quality guidelines for lowland rivers in South-east Australia are provided for salinity.

Values outside the ranges defined in the ANZECC guidelines are indicated with yellow, orange and red background colours.

<sup>A</sup> Guideline is for Aluminium in freshwater where pH > 6.5.

<sup>B</sup> Guideline assumes As in solution as Arsenic (AsV).

<sup>C</sup> Guideline for Chromium is applicable to Chromium (CrVI) only.

<sup>H</sup> Hardness affected (refer to Guidelines).

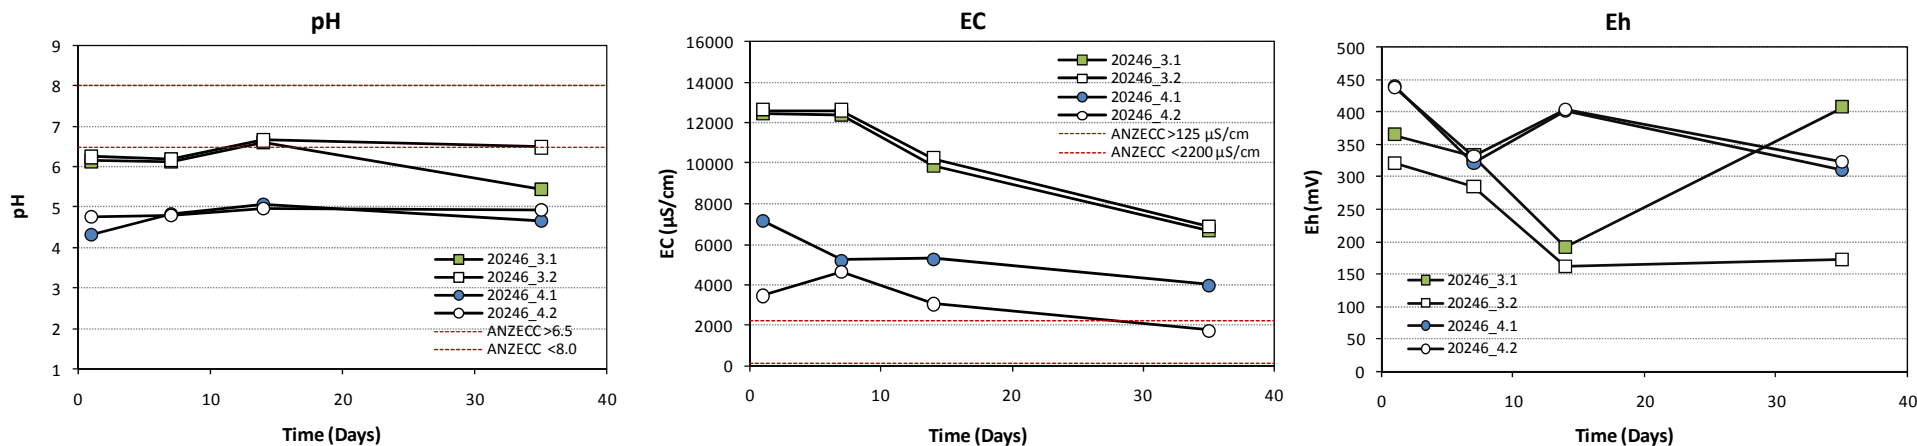


Figure 3-1: pH, EC and Eh dynamics over 35 days for the Wakool River Billabong sites (20246\_3 and 20246\_4).

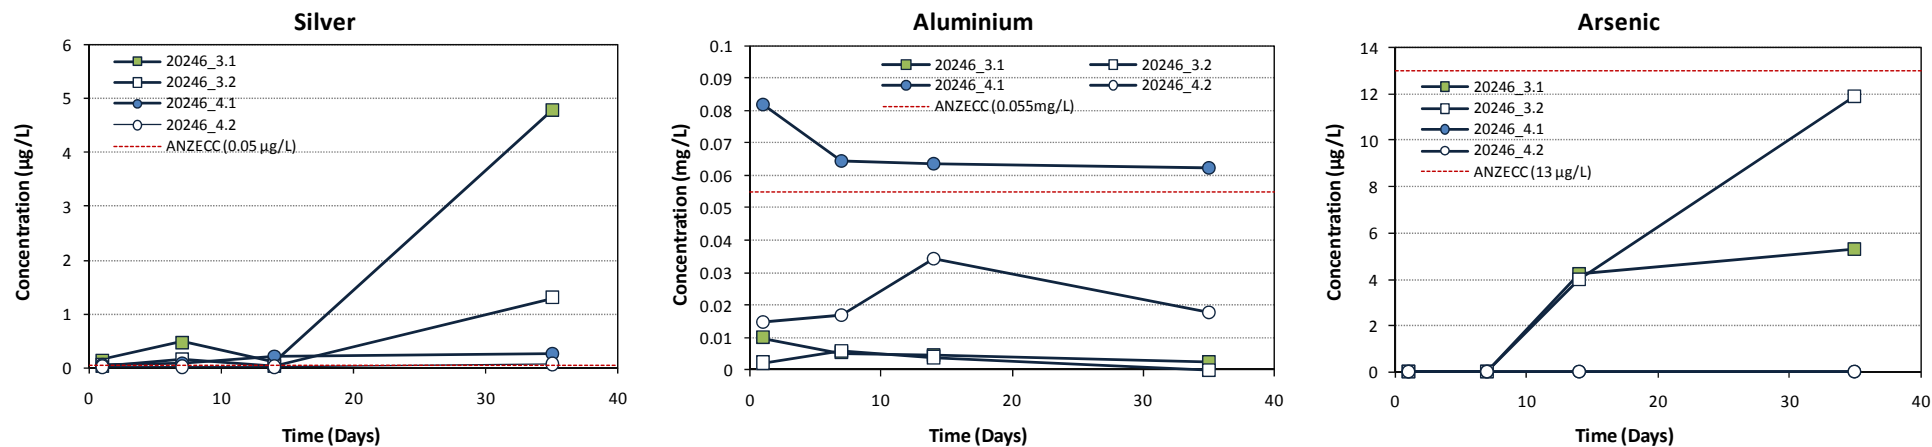


Figure 3-2: Contaminant and metalloid dynamics (Ag, Al and As) over 35 days for the Wakool River Billabong sites (20246\_3 and 20246\_4).

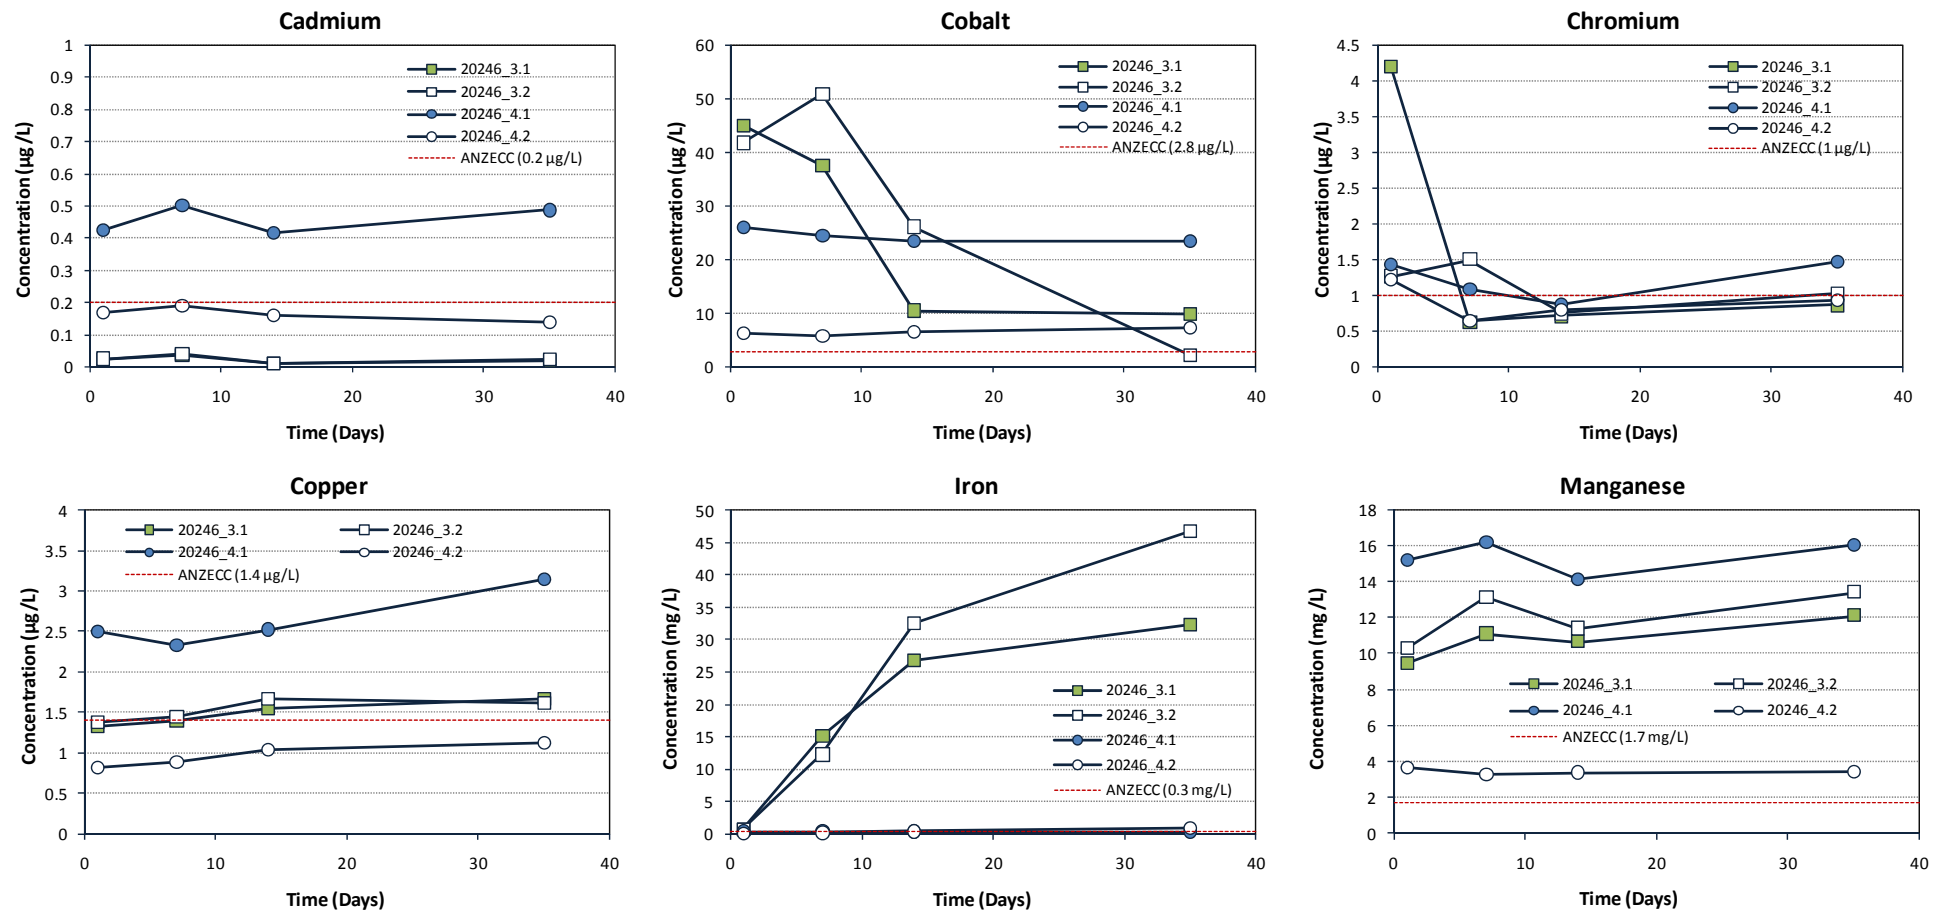


Figure 3-3: Contaminant and metalloid dynamics (Cd, Co, Cr, Cu, Fe and Mn) over 35 days the Wakool River Billabong sites (20246\_3 and 20246\_4).

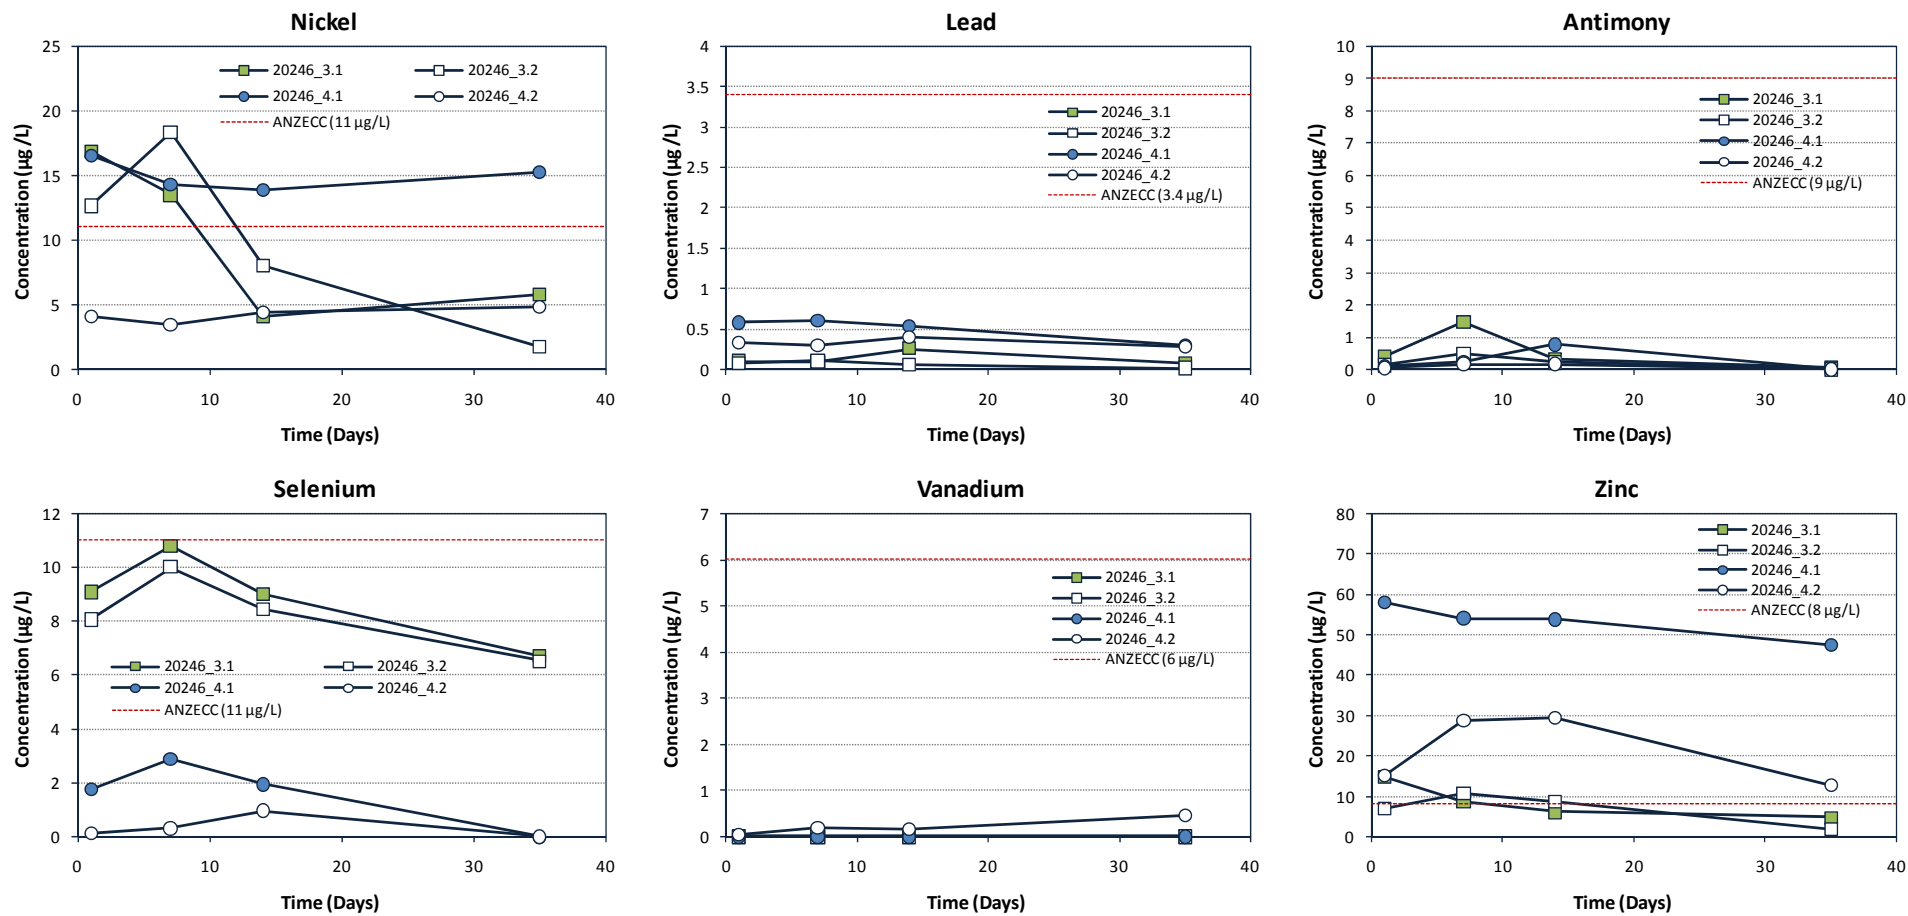


Figure 3-4: Contaminant and metalloid dynamics (Ni, Pb, Sb, Se, V and Zn) dynamics over 35 days the Wakool River Billabong sites (20246\_3 and 20246\_4).

### 3.1.2. Reactive metals data

The determination of the reactive metal fraction provides an indication of the total potential metal release from the sediment into surrounding waters. The reactive metals test used in this study gives an indication of the metals and metalloids that are more strongly bound to minerals (or weakly soluble with an acid extraction) than would be soluble with a water extraction. The moderately strong acid used (i.e. 0.1 M HCl) indicates the “stored metals” and metalloids associated with iron and manganese oxides, organic materials as well as acid soluble minerals. While the ANZECC sediment quality guidelines (ANZECC/ARMCANZ 2000) are based on total metal/metalloid concentrations, a reactive metal concentration near to or above guideline values indicate an elevated hazard.

The reactive metals data for the four Wakool River Billabong soil materials examined (i.e. 20246\_3.1, 20246\_3.2, 20246\_4.1 and 20246\_4.2) are presented in Appendix 1 (Table 8-5). The reactive metals data for the Wakool River Billabong soil materials showed all metals/metalloids were  $\leq 54\%$  of the ANZECC trigger value for the total metal/metalloid concentration (see Table 8-5, Appendix 1). While all reactive metal concentrations were below the ANZECC trigger value, the metal concentrations measured were sufficiently high to be a potential hazard if the total reactive fractions were to be released into a surrounding water body (i.e. above ANZECC water quality guidelines).

### 3.2. Interpretation and discussion of results

The contaminant and metalloid dynamics test undertaken as part of this Phase 2 assessment assists in determining the impacts on water quality by simulating the release of metal and metalloid concentrations that may occur under anaerobic conditions over a several week period. The contaminant and metalloid behaviour of the four Wakool River Billabong soil materials during the 35 day inundation often varied between the metals/metalloids examined (see Figures 3-2 to 3-4). The reductive dissolution of iron (Fe) and possibly manganese (Mn) minerals seemed to have partially controlled the release of sorbed arsenic (As) with the soil material from site 20246\_3, although the controls on the release of other metals were not clear.

The contaminant and metalloid dynamics data for the four soils from Wakool River Billabong showed nine of the metals examined (i.e. cadmium (Cd), cobalt (Co), chromium (Cr), copper (Cu), iron (Fe), manganese (Mn), nickel (Ni), silver (Ag) and zinc (Zn)) exceeded the ANZECC water quality guidelines during the inundation experiments (Table 3-1). The guidelines for cobalt (Co), iron (Fe) and silver (Ag) were exceeded by more than 10 times for both soils materials from site 20246\_3, with iron (Fe) exceeding the guideline by more than 100 times. Two metals (i.e. lead (Pb) and vanadium (V)) were below the limit of detection for all soil materials over the 35 day inundation period.

While the contaminant and metalloid dynamics test gives an indication of the metal/metalloid content of the soil, the overlying water will rarely have the concentration measured in solution during this test due to dilution in the receiving waters. It can therefore be assumed that if a metal/metalloid concentration did not exceed the ANZECC water quality guideline during the test it does not represent an environmental hazard. Thresholds for the degree of hazard associated with the contaminant and metalloid concentrations were developed with respect to the ANZECC water quality guidelines, and a summary of the degree of hazard each of the metals/metalloids pose at the sites examined in the Wakool River Billabong is given in Table 3-2. Note the background colours presented in Table 3-1 also correspond to the degree of hazard (i.e. no colour (no hazard), yellow (low hazard), orange (moderate hazard) and red (high hazard)).

**Table 3-2. Summary of the degree of hazard associated with the measured contaminant and metalloid concentrations.**

Degree of Hazard	Guideline Threshold	Metal/Metalloid
No Hazard	Value below ANZECC guideline threshold.	Al, As, Pb, Sb, Se, V
Low Hazard	Value exceeds ANZECC guideline threshold, but is less than 10x exceedance.	Cd, Cr, Cu, Mn, Ni, Zn
Moderate Hazard	Value exceeds ANZECC guideline threshold by 10x or more, but is less than 100x exceedance.	Ag, Co
High Hazard	Value exceeds ANZECC guideline threshold by 100x or more.	Fe

The nine metals found to exceed the ANZECC water quality guidelines during the inundation experiments represent a low to high hazard (Table 3-2). Iron was the only metal/metalloid observed to have a high hazard, and only at site 20246\_3 (Table 3-1). The two metals/metalloids with a moderate hazard (i.e. cobalt (Co) and silver (Ag)) were also only found to be a moderate hazard at site 20246\_3 (Table 3-1). All metals with a low hazard had this degree of hazard at both sites, except for cadmium (Cd) which had no hazard at site

20246\_3. Ward *et al.* (2011) observed a greater degree of hazard with the sulfuric soil material from Glen Esk-Rusty Waterhole following inundation, however, the sulfuric soil material at site 20246\_4 in the Wakool River Billabong only had the highest metal concentration with some metals (i.e. aluminium (Al), cadmium (Cd), copper (Cu), manganese (Mn), lead (Pb) and zinc (Zn)).

The reactive metal concentrations were significantly less than the ANZECC trigger value for total metals, although they were sufficiently high to be a potential hazard if released into a surrounding water body. In natural systems the dynamics of metal release will be governed by the upward chemical flux, which is a function of soil type, water flow, diffusion and chemistry of the soils near the sediment-water interface (MDBA 2011). It is also important to note that the metal/metalloid concentrations measured with the sulfidic soil at site 20246\_3 resulted from the inundation of largely unoxidised sulfidic soil materials. If these soil materials were to oxidise prior to inundation it is expected that the many of the metals/metalloids would have a greater hazard due to their higher solubilities at lower pH values.

## 4. RISK ASSESSMENT

### 4.1. Risk assessment framework

Risk is a measure of both the consequences of a hazard occurring, and the likelihood of its occurrence (MDBA 2011). According to the National Environment Protection Measures (NEPM), risk is defined as "*the probability in a certain timeframe that an adverse outcome will occur in a person, a group of people, plants, animals and/or the ecology of a specified area that is exposed to a particular dose or concentration of a hazardous agent, i.e. it depends on both the level of toxicity of hazardous agent and the level of exposure*" (NEPC 1999).

In this study a risk assessment framework has been applied to determine the specific risks associated with acidification, contaminant mobilisation and de-oxygenation. In this risk assessment framework a series of standardised tables are used to define and assess risk (MDBA 2011). The tables determine the consequence of a hazard occurring (Table 4-1), and a likelihood rating for the disturbance scenario for each hazard (Table 4-2). These two factors are then combined in a risk assessment matrix to determine the level of risk (Table 4-3).

Table 4-1 determines the level of consequence of a hazard occurring, ranging from insignificant to extreme, and primarily takes account of the environmental and water quality impacts, to the wetland values and/or adjacent waters.

**Table 4-1: Standardised table used to determine the consequences of a hazard occurring (from MDBA 2011).**

Descriptor	Definition
Extreme	Irreversible damage to wetland environmental values and/or adjacent waters; localised species extinction; permanent loss of drinking water (including stock and domestic) supplies.
Major	Long-term damage to wetland environmental values and/or adjacent waters; significant impacts on listed species; significant impacts on drinking water (including stock and domestic) supplies.
Moderate	Short-term damage to wetland environmental values and/or adjacent waters; short-term impacts on species and/or drinking water (including stock and domestic) supplies.
Minor	Localised short-term damage to wetland environmental values and/or adjacent waters; temporary loss of drinking water (including stock and domestic) supplies.
Insignificant	Negligible impact on wetland environmental values and/or adjacent waters; no detectable impacts on species.

Table 4-2 determines the likelihood (i.e. probability) of disturbance for each hazard, ranging from rare to almost certain. This requires an understanding of the nature and severity of the materials (including the extent and acid generating potential of acid sulfate soil materials, and the buffering capacity of wetland soil materials) as well as contributing factors influencing the risk (MDBA 2011). Examples of disturbance include: (i) rewetting of acid sulfate soil materials after oxidation, (ii) acid sulfate soil materials that are currently inundated and may be oxidised, or (iii) acid sulfate soil materials that are currently inundated and may be



dispersed by flushing (e.g. scouring flows) (MDBA 2011). As mentioned previously, the consequence of a hazard occurring and the likelihood rating for the disturbance scenario for each hazard are then ranked using a standardised risk assessment matrix (Table 4-3).

**Table 4-2: Likelihood ratings for the disturbance scenario (from MDBA 2011).**

Descriptor	Definition
Almost certain	Disturbance is expected to occur in most circumstances
Likely	Disturbance will probably occur in most circumstances
Possible	Disturbance might occur at some time
Unlikely	Disturbance could occur at some time
Rare	Disturbance may occur only in exceptional circumstances

**Table 4-3: Risk assessment matrix (adapted from Standards Australia & Standards New Zealand 2004).**

Likelihood category	Consequences category				
	Extreme	Major	Moderate	Minor	Insignificant
Almost certain	Very high	Very high	High	Medium	Low
Likely	Very high	High	Medium	Medium	Low
Possible	High	High	Medium	Low	Low
Unlikely	High	Medium	Medium	Low	Very low
Rare	High	Medium	Low	Very low	Very low

It is suggested that:

- For *very high* risk immediate action is recommended.
- For *high* risk senior management attention is probably needed.
- Where a *medium* risk is identified management action may be recommended.
- Where the risk is *low* or *very low*, routine condition monitoring is suggested.

These categories of management responses have been kept quite broad to acknowledge that jurisdictional authorities and wetland managers may choose to adopt different approaches in dealing with acid sulfate soils. The imprecise nature of these management responses is intended to provide flexibility in jurisdictional and wetland manager responses to the risk ratings associated with the acid sulfate soil hazards (MDBA 2011).

## 4.2. Assessment of risks

The following sub-sections discuss the risks associated with acidification (Section 4.2.1), contaminant mobilisation (Section 4.2.2) and de-oxygenation (Section 4.2.3) in the Wakool River Billabong. The risks associated with these hazards are dependent on a variety of factors including the scenario, wetland management regime and the species of aquatic organisms present. While likelihood of a disturbance scenario is taken into account in this risk assessment (see Table 4-2), the sensitivities and tolerances of different species of organism to each hazard has not been included. This risk assessment has primarily used the data obtained from both the Phase 1 and 2 acid sulfate soil assessments to give an overall assessment of each risk to the Wakool River Billabong and adjacent waters.

### 4.2.1. Risks associated with acidification

The Phase 1 assessment of acid sulfate soil materials in the Wakool River Billabong indicated the overall degree of acidification hazard was high (Ward *et al.* 2010). While the Phase 1 assessment found low to moderate net acidities were dominant within this wetland, five hypermonosulfidic materials at two sites had high net acidities. In addition, the water soluble sulfate content of surface soil materials at all four sites examined were over the trigger value for potential monosulfidic black ooze (MBO) formation.

Sulfuric, hypersulfidic and hypermonosulfidic soil materials which all represent an acidification hazard were identified within the Wakool River Billabong. A sulfuric soil material with a low net acidity was only observed in the surface soil located up a bank near to the water body at site 20246\_4. Hypersulfidic/hypermonosulfidic soil materials with low-high net acidities were observed at the three remaining sites (i.e. sites 20246\_1, 20246\_2 and 20246\_3). These sites were either in the billabong (sites 20246\_1 and 20246\_3) or at the edge of the billabong (site 20246\_2). Hypermonosulfidic soil materials with high net acidities were observed at sites 20246\_2 and 20246\_3.

It is expected that the consequence of an acidification hazard occurring would be *moderate* (i.e. short-term damage to wetland environmental values and/or adjacent waters; short-term impact on species and/or drinking water (including stock and domestic) supplies). The likelihood of these disturbance scenarios would be *almost certain*, and therefore there is a *high* risk associated with acidification in the Wakool River Billabong.

### 4.2.2. Risks associated with contaminant mobilisation

The high acidification hazard identified in the Wakool River Billabong Phase 1 assessment indicated that soil acidification may increase the solubility of metals and soil acidity may be sufficient for the mobilisation of aluminium (Al). In addition, the presence of monosulfidic materials in some surface soils and the potential for monosulfidic black ooze (MBO) formation identified in this wetland may also result in an appreciable metal release hazard. The contaminant and metalloid dynamics data showed many of the metals examined (i.e. cadmium (Cd), cobalt (Co), chromium (Cr), copper (Cu), iron (Fe), manganese (Mn), nickel (Ni), silver (Ag) and zinc (Zn)) exceeded the ANZECC water quality guidelines. The metal concentrations that exceeded the guidelines during the contaminant and metalloid dynamics test represented a low to high hazard, with only three metals (i.e. cobalt (Co), iron (Fe) and silver (Ag)) having a moderate-high hazard (see Table 3-2). However, the metal/metalloid concentrations measured with the sulfidic soil at site 20246\_3 result from the inundation of largely unoxidised sulfidic soil materials, and therefore if these soil materials were to oxidise prior to inundation it is expected that the many of the metals/metalloids would pose a higher hazard due to their greater solubilities at lower pH values.

If insufficient dilution of the contaminants was to occur in the receiving waters, there is a *moderate* consequence of a contaminant mobilisation hazard occurring (i.e. short-term damage to wetland environmental values and/or adjacent waters; short-term impact on species and/or drinking water (including stock and domestic) supplies). This disturbance scenario would be considered *likely*, and therefore there is a *medium* risk associated with contaminant mobilisation in the Wakool River Billabong.

### 4.2.3. Risks associated with de-oxygenation

Monosulfidic soil materials pose a de-oxygenation hazard if disturbed. Whilst the monosulfide formation potential test was not undertaken as part of the Phase 2 assessment for the Wakool River Billabong, the presence of monosulfidic soil materials was identified within the wetland (Ward *et al.* 2010). High monosulfide concentrations ( $S_{AV}$  up to 0.40% S) were observed throughout the soil profile at two sites and represent a high de-oxygenation hazard. As mentioned previously, the water soluble sulfate contents of surface soil materials at all sites were also over the trigger value for potential monosulfidic black ooze (MBO) formation. The sulfate data indicates the possible development of an appreciable de-oxygenation hazard after prolonged wet conditions.

These findings therefore indicate that the de-oxygenation hazard would represent short-term damage to wetland environmental values and/or adjacent waters and short-term impacts on species and/or drinking water (including stock and domestic) supplies (i.e. *moderate* consequence of a hazard occurring). Disturbance is expected to occur in most circumstances (i.e. *almost certain*) and therefore there is a *high* de-oxygenation risk in the Wakool River Billabong.

A summary of the risks associated with the presence of acid sulfate soils in the Wakool River Billabong is presented below in Table 4-4.

**Table 4-4: Summary of the risks associated with acid sulfate soils in Wakool River Billabong.**

Hazard	Level of risk
Acidification	High risk
Contaminant mobilisation	Medium risk
De-oxygenation	High risk

## 5. BROAD ACID SULFATE SOIL MANAGEMENT OPTIONS

This Phase 2 assessment identified the following risks associated with the presence of acid sulfate soils in the Wakool River Billabong:

- high acidification risk,
- medium contaminant mobilisation risk, and
- high de-oxygenation risk.

The acid sulfate soil materials identified in the Wakool River Billabong have the potential to present a serious risk to the environmental values of both the wetland and adjacent waters if not managed appropriately. A variety of options are available to manage landscapes where acid sulfate soil materials are observed. A national guidance document on the management of inland acid sulfate soil landscapes titled “*National guidance for the management of acid sulfate soils in inland aquatic ecosystems*” has recently been released (EPHC & NRMMC 2011). The national guidance document provides a hierarchy of management options for managing acid sulfate soils in inland aquatic ecosystems including:

1. *Minimising the formation of acid sulfate soils in inland aquatic ecosystems.*
2. *Preventing oxidation of acid sulfate soils, if they are already present in quantities of concern or controlled oxidation to remove acid sulfate soils if levels are a concern but the water and soil has adequate neutralising capacity.*
3. *Controlling or treating acidification if oxidation of acid sulfate soils does occur.*
4. *Protecting connected aquatic ecosystems/other parts of the environment if treatment of the directly affected aquatic ecosystem is not feasible.*

*In some instances it may not be practical or even sensible to undertake any active intervention (for example in a pond used as part of a salt interception scheme), in which case the management objective is:*

5. *Limited further intervention.*

In designing a management strategy for dealing with acid sulfate soils in affected inland wetlands, other values and uses of a wetland need to be taken into account to ensure that any intervention is compatible with other management plans and objectives for the wetland.

The possible activities associated with each management objective are summarised in Table 5-1. Further information on each management option is provided in detail in the national guidance document (EPHC & NRMMC 2011).

The presence of acid sulfate soil materials with high acidification and de-oxygenation risks and medium contaminant mobilisation risk would suggest that the most appropriate management strategy for the Wakool River Billabong would be to prevent oxidation of the identified acid sulfate soil materials. As outlined in Table 5-1, in order to prevent oxidation it is necessary to keep the acid sulfate soil materials inundated, and if possible avoid flow regimes that could re-suspend these sediments. In the event of disturbance chemical ameliorants such as lime can be added to neutralise the water column and/or sediments. Details on the ameliorants available including their advantages and disadvantages are provided in the national guidance document (EPHC & NRMMC 2011). Controlled oxidation would not be a recommended management strategy in the Wakool River Billabong due to the lack of neutralising capacity within the sediments, the medium risk of contaminant release and the presence of hypermonosulfidic soil materials at the time of sampling.

**Table 5-1: Summary of management options and possible activities (from EPHC & NRMMC 2011).**

<b>Management objective</b>	<b>Activities</b>
<b>Minimising the formation of acid sulfate soils in inland aquatic ecosystems</b>	<p><b>Reduce secondary salinisation through:</b></p> <ul style="list-style-type: none"> <li>• Lowering saline water tables</li> <li>• Maintaining the freshwater lens between saline groundwater and the aquatic ecosystem</li> <li>• Stopping the delivery of irrigation return water</li> <li>• Incorporating a more natural flow regime.</li> </ul>
<b>Preventing oxidation of acid sulfate soils or controlled oxidation to remove acid sulfate soils</b>	<p><b>Preventing oxidation:</b></p> <ul style="list-style-type: none"> <li>• Keep the sediments covered by water</li> <li>• Avoid flow regimes that could re-suspend sediments.</li> </ul> <p><b>Controlled oxidation:</b></p> <ul style="list-style-type: none"> <li>• Assess whether neutralising capacity of the sediments and water far exceeds the acidity produced by oxidation</li> <li>• Assess the risk of de-oxygenation and metal release. Monitor intervention and have a contingency plan to ensure avoidance of these risks.</li> </ul>
<b>Controlling or treating acidification</b>	<ul style="list-style-type: none"> <li>• Neutralise water column and/or sediments by adding chemical ameliorants</li> <li>• Add organic matter to promote bioremediation by micro-organisms</li> <li>• Use stored alkalinity in the ecosystem.</li> </ul>
<b>Protecting adjacent or downstream environments if treatment of the affected aquatic ecosystem is not feasible</b>	<ul style="list-style-type: none"> <li>• Isolate the site</li> <li>• Neutralise and dilute surface water</li> <li>• Treat discharge waters by neutralisation or biological treatment.</li> </ul>
<b>Limited further intervention</b>	<ul style="list-style-type: none"> <li>• Assess risk</li> <li>• Communicate with stakeholders</li> <li>• Undertake monitoring</li> <li>• Assess responsibilities and obligations and take action as required.</li> </ul>

The Phase 1 acid sulfate soil assessment of the Wakool River Billabong (Ward *et al.* 2010) only provided a snapshot of the acid sulfate soil materials present and the conditions at selected locations in the wetland in March 2010. Since sampling the prolonged drought in the Murray-Darling Basin has come to an end and many regions have experienced major flooding. While flooding was probably not strong enough to scour the acid sulfate soil materials from the Wakool River Billabong, inundation of this wetland may have minimised the risks identified in this study in the short-term. However, it is also likely that the recent inundation will lead to further formation of acid sulfate soil materials, particularly highly reactive monosulfidic soil materials, within the Wakool River Billabong.

It should be noted that further understanding of the complex interactions between surface water flow, groundwater processes, biogeochemistry and the different pathways for the development of acid sulfate soils in inland aquatic ecosystems is required for satisfactory management and preventative strategies. A more robust understanding of these complex interactions is needed before implementing any new strategies for multiple benefits.

## 6. CONCLUSIONS AND RECOMMENDATIONS

This report provides the results of a Phase 2 investigation that was undertaken for the Wakool River Billabong to determine the nature, severity and the specific risks associated with acid sulfate soil materials. The Phase 2 assessment of the Wakool River Billabong examined both the contaminant and metalloid dynamics and reactive metals associated with surface layers from two sites within Wakool River Billabong to identify the risk associated with contaminant mobilisation. The risks associated with both acidification and de-oxygenation were primarily determined using data from the Phase 1 assessment (Ward *et al.* 2010).

The contaminant and metalloid dynamics over 35 days of inundation showed under the experimental conditions nine of the metals examined (including cadmium (Cd), cobalt (Co), chromium (Cr), copper (Cu), iron (Fe), manganese (Mn), nickel (Ni), silver (Ag) and zinc (Zn)) were found to exceed the ANZECC water quality guidelines during the inundation experiments. The guidelines for cobalt (Co), iron (Fe) and silver (Ag) were exceeded by more than 10 times at one site, with iron (Fe) exceeding the guideline by more than 100 times.

The contaminant and metalloid behaviour often varied between the metals/metalloids examined during the inundation experiments. The reductive dissolution of iron and possibly manganese minerals seemed to have partially controlled the release of sorbed arsenic, although the controls on the release of other metals were not clear. The trend with some metals/metalloids indicates further potential for release had the incubation experiments been allowed to proceed for a longer timeframe; it is also likely that many of the metals/metalloids will become incorporated into sulfide minerals following further reduction.

The metals found to exceed the ANZECC water quality guidelines during the inundation experiments represent a low to high hazard (see Table 3-2). The reactive metal concentrations were also found to be sufficiently high to be a potential hazard if released into surrounding waters. In natural systems the dynamics of metal release will be governed by the upward chemical flux, which is a function of soil type, water flow, diffusion and chemistry of the soils near the sediment-water interface (MDBA 2011).

A risk assessment framework was applied to determine the specific risks associated with acidification, contaminant mobilisation and de-oxygenation (MDBA 2011). The Phase 2 assessment identified the following risks associated with the presence of acid sulfate soils in the Wakool River Billabong:

- high acidification risk,
- medium contaminant mobilisation risk, and
- high de-oxygenation risk.

These findings indicate that, if not managed appropriately, the acid sulfate soil materials identified in the Wakool River Billabong have the potential to present a serious risk to the environmental values of both the wetland and adjacent waters. This report outlines the variety of management options available to manage acid sulfate soils in inland aquatic ecosystems. The most appropriate management strategy for the Wakool River Billabong would be to prevent oxidation of the acid sulfate soil materials identified. Neutralisation may be the best management strategy in the event of disturbance. However, in designing a management strategy for dealing with acid sulfate soils in affected inland wetlands, other values and uses of a wetland need to be taken into account to ensure that any intervention is compatible with other management plans and objectives for the wetland.

It is important to note that the soil materials collected in March 2010 as part of the Phase 1 assessment only provided a snapshot of the acid sulfate soil materials present and the

conditions at selected locations in the wetland. While recent inundation within the wetland may have minimised the risks identified in the short-term, it is also likely that this inundation will lead to further formation of acid sulfate soil materials.

It is recommended that, within the context of other management objectives for the wetland, consideration be given to undertaking water quality monitoring to identify potential contamination as a result of the disturbance of acid sulfate soils within the wetland. The presence of some high risks identified in this Phase 2 assessment indicates that senior management attention is probably needed (MDBA 2011).

## 7. REFERENCES

ANZECC/ARMCANZ (2000) 'Australian and New Zealand guidelines for fresh and marine water quality.' (Australian and New Zealand Environment and Conservation Council, Agricultural and Resource Management Council of Australia and New Zealand: Canberra). [http://hermes.erin.gov.au/pls/crg\\_public!/CRGPPUBLIC.PSTART?strAction=SearchByChemical](http://hermes.erin.gov.au/pls/crg_public!/CRGPPUBLIC.PSTART?strAction=SearchByChemical)

APHA (2005) 'Standard methods for the examination of water and wastewater (21st Ed.)' (American Public Health Association - American Water Works Association: Baltimore, USA).

Burton ED, Bush RT, Sullivan LA, Johnston SG, Mitchell DRG (2008) Mobility of arsenic and selected metals during re-flooding of iron- and organic-rich acid-sulfate soil. *Chemical Geology* **253**, 64-73.

Dent D (1986) 'Acid sulphate soils: a baseline for research and development.' (International Institute for Land Reclamation and Improvement ILRI, Wageningen, The Netherlands).

EPHC & NRMCC (2011) National guidance for the management of acid sulfate soils in inland aquatic ecosystems. Canberra.

MDBA (2010) 'Detailed assessment of acid sulfate soils in the Murray-Darling Basin: Protocols for sampling, field characterisation, laboratory analysis and data presentation.' MDBA Publication No. 57/10, 58 pp.

MDBA (2011) 'Acid sulfate soils in the Murray-Darling Basin.' Murray-Darling Basin Authority, Canberra. MDBA Publication No. 147/11.

NEPC (1999) National environment protection (assessment of site contamination) measure 1999. National Environment Protection Council.

Standards Australia & Standards New Zealand (2004) HB 436: 2004, Risk Management, Sydney, NSW.

Ward NJ, Bush RT, Sullivan LA, Coughran J, Fyfe DM (2011) Assessment of Acid Sulfate Soil Materials (Phase 2): Glen Esk-Rusty Waterhole. Southern Cross GeoScience Technical Report No. 113, Southern Cross University, Lismore, NSW. 36 pp.

Ward NJ, Bush RT, Sullivan LA, Fyfe DM, Coughran J, Tulau M, Allman B, Morand D, Wong VNL (2010) Assessment of acid sulfate soil materials in the Edward and Wakool Rivers region of the Murray-Darling Basin. Southern Cross GeoScience Technical Report No. 410, Southern Cross University, Lismore, NSW. 162 pp.



## 8. APPENDICES

## APPENDIX 1. SOIL ANALYTICAL DATA

Table 8-1. Sample 20246\_3.1 contaminant and metalloid dynamics data.

Parameter	units	ANZECC Guidelines	24 hours		7 days		14 days		35 days	
			Av.	±	Av.	±	Av.	±	Av.	±
pH		6.5-8.0	6.15	0.24	6.14	0.09	6.61	0.15	5.45	0.25
EC*	µS cm <sup>-1</sup>	125-2200	12435	185	12385	265	9870	740	6685	5
Eh	mV		365	4	334	53	192	27	408	43
Ag	µg l <sup>-1</sup>	0.05	0.15	<0.10	0.48	0.26	0.10	<0.10	4.78	1.96
Al <sup>A</sup>	mg l <sup>-1</sup>	0.055	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
As <sup>B</sup>	µg l <sup>-1</sup>	13	<1.0	<1.0	<1.0	<1.0	4.2	<1.0	5.3	<1.0
Cd	µg l <sup>-1</sup>	0.2	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Co	µg l <sup>-1</sup>	2.8	44.9	15.7	37.4	3.4	10.4	6.1	9.8	6.6
Cr <sup>C</sup>	µg l <sup>-1</sup>	1	4.2	3.2	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Cu <sup>H</sup>	µg l <sup>-1</sup>	1.4	1.3	<1.0	1.4	<1.0	1.6	<1.0	1.7	<1.0
Fe	mg l <sup>-1</sup>	0.30	0.81	0.19	15.21	0.52	26.96	0.24	32.41	17.58
Mn	mg l <sup>-1</sup>	1.70	9.48	0.21	11.11	1.52	10.66	0.48	12.11	1.13
Ni <sup>H</sup>	µg l <sup>-1</sup>	11	16.8	6.4	13.5	2.6	4.1	1.9	5.8	3.6
Pb <sup>H</sup>	µg l <sup>-1</sup>	3.4	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Sb	µg l <sup>-1</sup>	9	<1.0	<1.0	1.5	1.1	<1.0	<1.0	<1.0	<1.0
Se	µg l <sup>-1</sup>	11	9.1	1.8	10.8	1.1	9.0	<1.0	6.7	2.3
V	µg l <sup>-1</sup>	6	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Zn <sup>H</sup>	µg l <sup>-1</sup>	8	14.7	9.9	8.7	4.3	6.0	2.6	4.8	1.5

### Notes.

The ANZECC guideline values for toxicants refer to the Ecosystem Protection – Freshwater Guideline for protection of 95% of biota in 'slightly-moderately disturbed' systems, as outlined in the Australian Water Quality Guidelines for Fresh and Marine Water Quality (ANZECC/ARMCANZ 2000).

\* ANZECC water quality guidelines for lowland rivers in South-east Australia are provided for salinity.

Values outside the ranges defined in the ANZECC guidelines are indicated with red text.

The deviation from the mean is represented by '±'.

<sup>A</sup> Guideline is for Aluminium in freshwater where pH > 6.5.

<sup>B</sup> Guideline assumes As in solution as Arsenic (AsV).

<sup>C</sup> Guideline for Chromium is applicable to Chromium (CrVI) only.

<sup>H</sup> Hardness affected (refer to Guidelines).

**Table 8-2. Sample 20246\_3.2 contaminant and metalloid dynamics data.**

Parameter	units	ANZECC Guidelines	24 hours		7 days		14 days		35 days	
			Av.	±	Av.	±	Av.	±	Av.	±
pH		6.5-8.0	6.25	0.06	6.18	0.09	6.66	0.02	6.48	0.26
EC*	µS cm <sup>-1</sup>	125-2200	12625	125	12595	405	10260	980	6915	115
Eh	mV		321	23	286	10	161	1	172	17
Ag	µg l <sup>-1</sup>	0.05	<0.10	<0.10	0.16	<0.10	<0.10	<0.10	1.30	0.91
Al <sup>A</sup>	mg l <sup>-1</sup>	0.055	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
As <sup>B</sup>	µg l <sup>-1</sup>	13	<1.0	<1.0	<1.0	<1.0	4.0	<1.0	11.9	3.4
Cd	µg l <sup>-1</sup>	0.2	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Co	µg l <sup>-1</sup>	2.8	41.7	4.3	50.7	20.4	26.1	15.3	2.2	<1.0
Cr <sup>C</sup>	µg l <sup>-1</sup>	1	1.3	<1.0	1.5	<1.0	<1.0	<1.0	1.0	<1.0
Cu <sup>H</sup>	µg l <sup>-1</sup>	1.4	1.4	<1.0	1.4	<1.0	1.7	<1.0	1.6	<1.0
Fe	mg l <sup>-1</sup>	0.30	0.79	0.42	12.31	0.55	32.57	5.46	46.82	13.35
Mn	mg l <sup>-1</sup>	1.70	10.32	0.32	13.13	0.31	11.40	0.19	13.40	0.75
Ni <sup>H</sup>	µg l <sup>-1</sup>	11	12.7	1.9	18.3	6.0	8.0	6.7	1.8	<1.0
Pb <sup>H</sup>	µg l <sup>-1</sup>	3.4	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Sb	µg l <sup>-1</sup>	9	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Se	µg l <sup>-1</sup>	11	8.1	2.3	10.0	1.5	8.4	2.0	6.5	6.5
V	µg l <sup>-1</sup>	6	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Zn <sup>H</sup>	µg l <sup>-1</sup>	8	7.1	<1.0	10.8	2.9	8.6	7.8	1.8	<1.0

**Notes.**

The ANZECC guideline values for toxicants refer to the Ecosystem Protection – Freshwater Guideline for protection of 95% of biota in 'slightly-moderately disturbed' systems, as outlined in the Australian Water Quality Guidelines for Fresh and Marine Water Quality (ANZECC/ARMCANZ 2000).

\* ANZECC water quality guidelines for lowland rivers in South-east Australia are provided for salinity.

Values outside the ranges defined in the ANZECC guidelines are indicated with red text.

The deviation from the mean is represented by '±'.

<sup>A</sup> Guideline is for Aluminium in freshwater where pH > 6.5.

<sup>B</sup> Guideline assumes As in solution as Arsenic (AsV).

<sup>C</sup> Guideline for Chromium is applicable to Chromium (CrVI) only.

<sup>H</sup> Hardness affected (refer to Guidelines).

**Table 8-3. Sample 20246\_4.1 contaminant and metalloid dynamics data.**

Parameter	units	ANZECC Guidelines	24 hours		7 days		14 days		35 days	
			Av.	±	Av.	±	Av.	±	Av.	±
pH		6.5-8.0	4.32	0.06	4.84	0.43	5.08	0.65	4.68	0.02
EC*	µS cm <sup>-1</sup>	125-2200	7175	35	5230	1900	5300	620	4005	285
Eh	mV		441	12	322	13	403	37	311	25
Ag	µg l <sup>-1</sup>	0.05	<0.10	<0.10	<0.10	<0.10	0.23	0.20	0.28	0.18
Al <sup>A</sup>	mg l <sup>-1</sup>	0.055	0.08	<0.01	0.06	<0.01	0.06	<0.01	0.06	<0.01
As <sup>B</sup>	µg l <sup>-1</sup>	13	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Cd	µg l <sup>-1</sup>	0.2	0.4	<0.1	0.5	<0.1	0.4	<0.1	0.5	<0.1
Co	µg l <sup>-1</sup>	2.8	26.0	<1.0	24.5	1.8	23.3	<1.0	23.4	<1.0
Cr <sup>C</sup>	µg l <sup>-1</sup>	1	1.4	<1.0	1.1	<1.0	<1.0	<1.0	1.5	<1.0
Cu <sup>H</sup>	µg l <sup>-1</sup>	1.4	2.5	<1.0	2.3	<1.0	2.5	<1.0	3.1	<1.0
Fe	mg l <sup>-1</sup>	0.30	0.28	0.04	0.33	0.02	0.34	0.04	0.35	0.03
Mn	mg l <sup>-1</sup>	1.70	15.19	0.12	16.20	0.20	14.12	0.16	16.06	1.50
Ni <sup>H</sup>	µg l <sup>-1</sup>	11	16.5	1.4	14.3	1.4	13.9	1.1	15.2	<1.0
Pb <sup>H</sup>	µg l <sup>-1</sup>	3.4	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Sb	µg l <sup>-1</sup>	9	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Se	µg l <sup>-1</sup>	11	1.8	<1.0	2.9	<1.0	1.9	<1.0	<1.0	<1.0
V	µg l <sup>-1</sup>	6	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Zn <sup>H</sup>	µg l <sup>-1</sup>	8	58.1	3.7	54.1	-	53.7	<1.0	47.3	<1.0

**Notes.**

The ANZECC guideline values for toxicants refer to the Ecosystem Protection – Freshwater Guideline for protection of 95% of biota in 'slightly-moderately disturbed' systems, as outlined in the Australian Water Quality Guidelines for Fresh and Marine Water Quality (ANZECC/ARMCANZ 2000).

\* ANZECC water quality guidelines for lowland rivers in South-east Australia are provided for salinity.

Values outside the ranges defined in the ANZECC guidelines are indicated with red text.

The deviation from the mean is represented by '±'.

<sup>A</sup> Guideline is for Aluminium in freshwater where pH > 6.5.

<sup>B</sup> Guideline assumes As in solution as Arsenic (AsV).

<sup>C</sup> Guideline for Chromium is applicable to Chromium (CrVI) only.

<sup>H</sup> Hardness affected (refer to Guidelines).

**Table 8-4. Sample 20246\_4.2 contaminant and metalloid dynamics data.**

Parameter	units	ANZECC Guidelines	24 hours		7 days		14 days		35 days	
			Av.	±	Av.	±	Av.	±	Av.	±
pH		6.5-8.0	4.77	0.02	4.81	0.02	4.98	0.04	4.96	0.16
EC*	µS cm <sup>-1</sup>	125-2200	3460	10	4615	1365	3039	137	1753	111
Eh	mV		439	16	332	0	405	33	324	37
Ag	µg l <sup>-1</sup>	0.05	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10	<0.10
Al <sup>A</sup>	mg l <sup>-1</sup>	0.055	0.01	<0.01	0.02	<0.01	0.03	0.01	0.02	<0.01
As <sup>B</sup>	µg l <sup>-1</sup>	13	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Cd	µg l <sup>-1</sup>	0.2	0.2	<0.1	0.2	<0.1	0.2	<0.1	0.1	<0.1
Co	µg l <sup>-1</sup>	2.8	6.2	<1.0	5.8	<1.0	6.5	<1.0	7.3	1.7
Cr <sup>C</sup>	µg l <sup>-1</sup>	1	1.2	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Cu <sup>H</sup>	µg l <sup>-1</sup>	1.4	<1.0	<1.0	<1.0	<1.0	1.0	<1.0	1.1	<1.0
Fe	mg l <sup>-1</sup>	0.30	0.17	0.01	0.22	0.04	0.41	0.21	0.92	0.76
Mn	mg l <sup>-1</sup>	1.70	3.65	0.05	3.28	0.03	3.38	0.18	3.44	0.10
Ni <sup>H</sup>	µg l <sup>-1</sup>	11	4.1	<1.0	3.4	<1.0	4.4	<1.0	4.8	<1.0
Pb <sup>H</sup>	µg l <sup>-1</sup>	3.4	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Sb	µg l <sup>-1</sup>	9	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Se	µg l <sup>-1</sup>	11	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
V	µg l <sup>-1</sup>	6	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Zn <sup>H</sup>	µg l <sup>-1</sup>	8	15.0	<1.0	28.5	15.9	29.2	15.1	12.6	1.1

**Notes.**

The ANZECC guideline values for toxicants refer to the Ecosystem Protection – Freshwater Guideline for protection of 95% of biota in 'slightly-moderately disturbed' systems, as outlined in the Australian Water Quality Guidelines for Fresh and Marine Water Quality (ANZECC/ARMCANZ 2000).

\* ANZECC water quality guidelines for lowland rivers in South-east Australia are provided for salinity.

Values outside the ranges defined in the ANZECC guidelines are indicated with red text.

The deviation from the mean is represented by '±'.

<sup>A</sup> Guideline is for Aluminium in freshwater where pH > 6.5.

<sup>B</sup> Guideline assumes As in solution as Arsenic (AsV).

<sup>C</sup> Guideline for Chromium is applicable to Chromium (CrVI) only.

<sup>H</sup> Hardness affected (refer to Guidelines).

Table 8-5. Reactive metals data (mg/kg dry wt.).

Parameter	ANZECC Sediment Quality Guidelines*		Reactive metals				% of Trigger value			
	SQG-Low (Trigger value)	SQG-High	20246_3.1	20246_3.2	20246_4.1	20246_4.2	20246_3.1	20246_3.2	20246_4.1	20246_4.2
			Av.	Av.	Av.	Av.	%	%	%	%
Ag	1	3.7	0.004	0.003	0.003	0.008	<1%	<1%	<1%	<1%
Al			502	440	120	190				
As	20	70	1.07	1.05	0.16	0.22	5%	5%	<1%	1%
Cd	1.5	10	0.144	0.068	0.006	0.009	10%	5%	<1%	<1%
Co			10.83	10.28	0.40	0.35				
Cr	80	370	0.17	0.20	0.07	0.08	<1%	<1%	<1%	<1%
Cu	65	270	4.48	4.19	0.88	1.85	7%	6%	1%	3%
Fe			2,026	2,024	257	280				
Mn			416	417	188	90				
Ni	21	52	11.40	8.24	0.63	0.72	54%	39%	3%	3%
Pb	50	220	13.80	8.75	0.46	2.40	28%	18%	<1%	5%
Sb	2	25	0.005	0.005	0.004	0.008	<1%	<1%	<1%	<1%
Se			1.43	1.21	0.24	0.13				
V			6.60	7.98	0.56	2.19				
Zn	200	410	35.69	27.02	1.47	2.88	18%	14%	<1%	1%

\* The ANZECC sediment quality guidelines (SQG) are for total metal concentrations (ANZECC/ARMCANZ 2000)

